
UNIS "GINEX" d.d.

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

DETONATOR UG 1344-B1

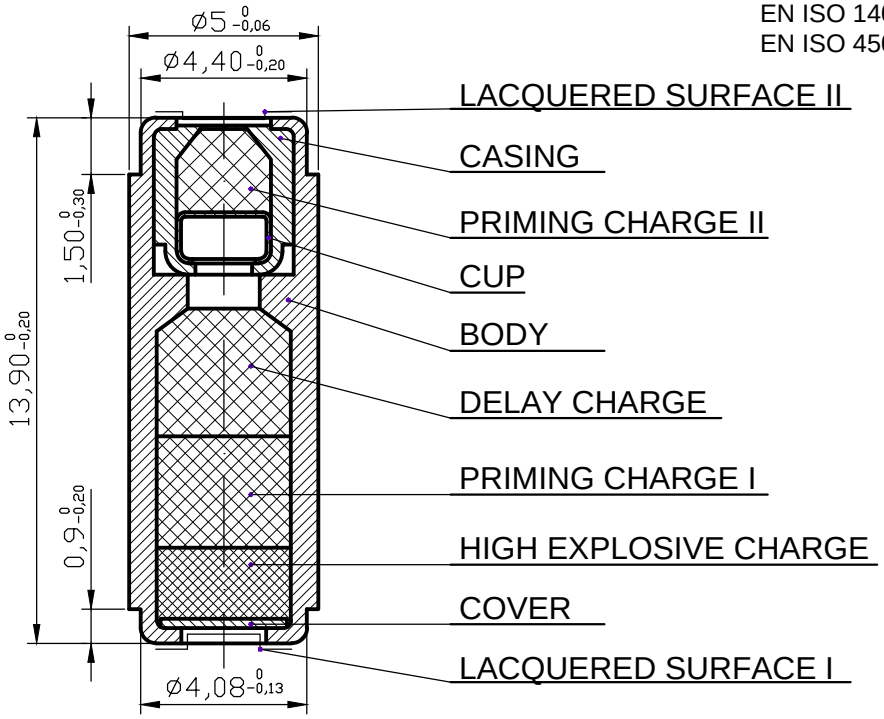

DESIGNED FOR USE IN:
Artillery ammunition

TECHNICAL CHARACTERISTICS	
Position	Material identification
Lacquered surface I	Nitro lacquer green
Cover	Al 99,5.24
High explosive charge	Penthrite
Priming charge I	Pb azide
Delay charge	Delay mixture
Body	AlCu5PbBi.54
Cup	Al 99,5.24
Priming charge II	Priming mixture
Casing	AlCu5PbBi.54
Lacquer surface	Alcohol shellac red

SENSITIVITY		
		Ball weight
Upper sensitivity limit	300 mm	56 g
Lower sensitivity limit	25 mm	7 g
Firing pin		Ø3,96mm; ∢ 28°
Testing in tools		

PACKING
100 pcs. of primers packed into a plastic tray with carton cover
1 plastic tray packed into a plastic box
5 plastic boxes packed into a carton box
30 carton boxes (15 000 pcs. of primers) packed into a special (carton or wooden) case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina