

UNIS "GINEX" d.d.

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

PRIMER 4,5/3-P1-SP for .38 SPECIAL

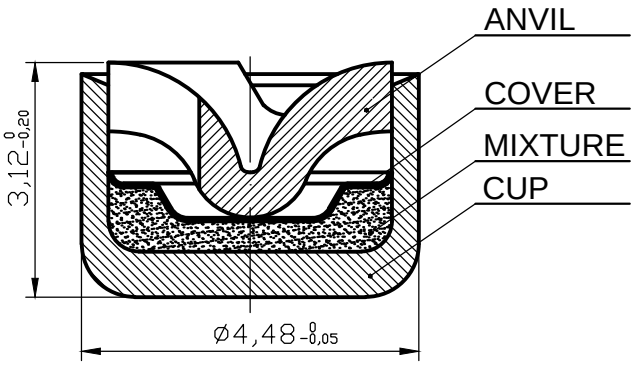

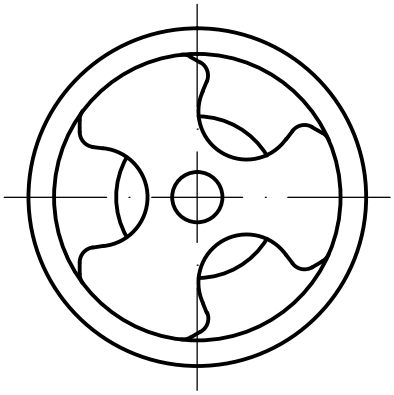

DESIGNED FOR USE IN:
9mm LUGER; START 8mm; 9mm PA; 9mm KNALL; 9mm PARA; .25 ACP; .32 ACP; 380 AUTO; .38 SPECIAL

TECHNICAL CHARACTERISTICS		
Position	Material identification	Dimensions
Cup	CuZn30	$0{,}41^{0}_{-0{,}02}$ mm
Anvil	CuZn30	$0{,}91^{0}_{-0{,}03}$ mm
Cover	Paper disc	$0{,}10^{0}_{-0{,}02}$ mm
Primer lacquers	Nitrolacquer red	-
Mixture	Non corrosive, without Hg	$0{,}021^{\pm 0{,}002}$ g

SENSITIVITY	
Ball weight	55 g
Upper statistical limit	$\bar{H}$ + 4S ⩽ 279,4mm (11")
Lower statistical limit	$\bar{H}$ - 2S ⩾ 25,4 mm (1")
Firing pin	Ø2mm; R1mm
Testing in cartridge case	8mm; 9mm

PACKING
100pcs. of primers packed into a plastic tray with carton cover
50 pcs. of plastic trays packed into a carton box
10 carton boxes (50 000 pcs. of primers) packed into a special (carton or wooden) case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina