
UNIS "GINEX" d.d.

PRIMER B-37-IP1

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

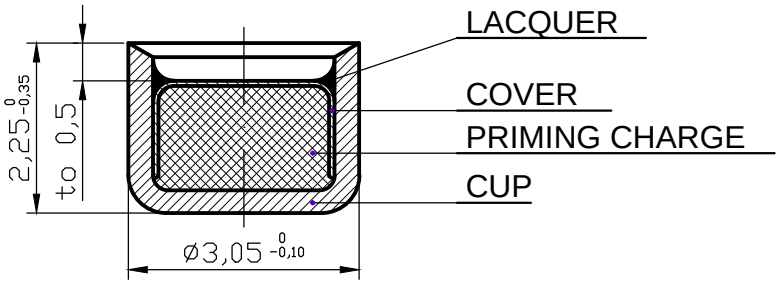

DESIGNED FOR USE IN:
Artillery ammunition

TECHNICAL CHARACTERISTICS	
Position	Material identification
Cup, nickel plated	Cu 99,5
Priming charge	Sinoxide charge
Cover, nickel plated	Cu 99,5
Lacquer	Alcohol shellac

SENSITIVITY	
Ball weight	100 g
Upper sensitivity limit	70 mm
Lower sensitivity limit	5 mm
Firing pin	Ø3mm; ∢ 23°30'
Testing in tools	

PACKING
100 pcs. of primers packed into a plastic tray with carton cover
3 plastic tray packed into a plastic box
5 plastic boxes packed into a carton box
10 carton boxes (15 000 pcs. of primers) packed into a special (carton or wooden) case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina