
UNIS "GINEX" d.d.

ELECTRIC DETONATOR ED-P1

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

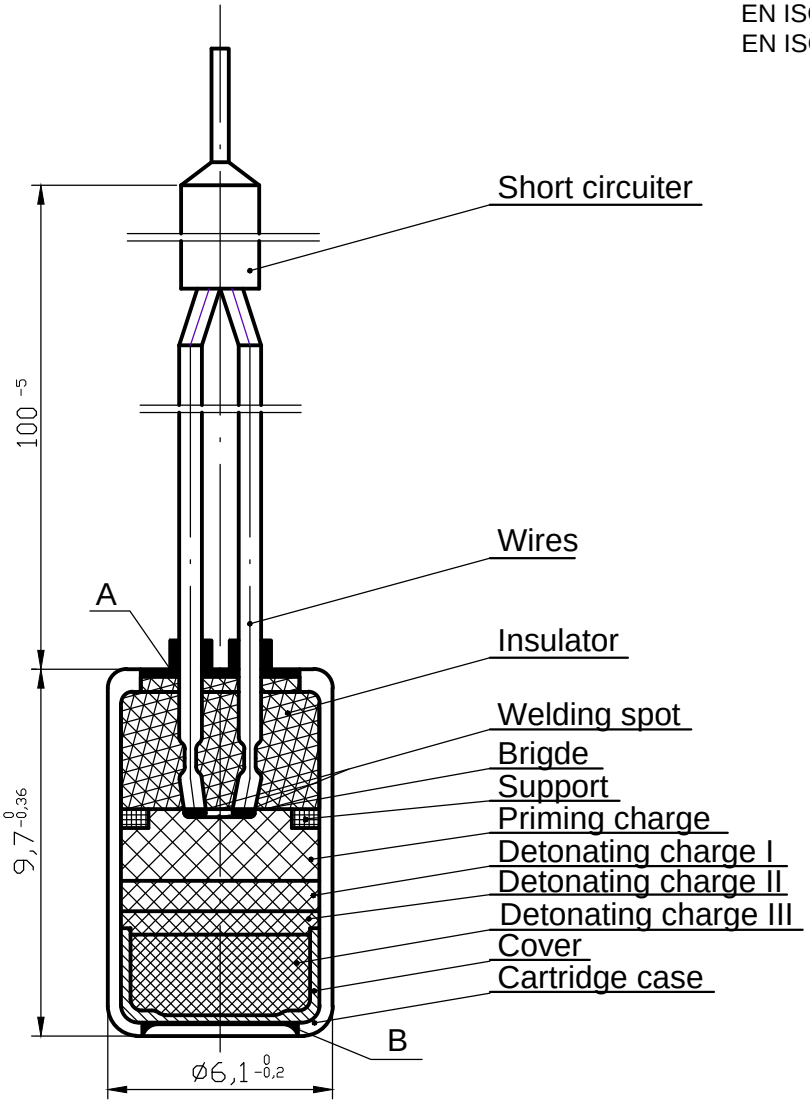

DESIGNED FOR USE IN:
Safety mechanism OR-130 of Fuze UTE,M85 for rocket 262 mm

QUALITY REQUIREMENTS:

1. ED-P1 must have electrical resistance within 5 to 9 Ω
2. ED-P1 must fail to function when direct current of 0,05 A is applied through the bridge for 5 minutes.
3. ED-P1 must properly function when direct current of 1 A is applied through the bridge.
4. ED-P1 must function at discharge of condenser of 5 μ F capacity charged to 20 V.
5. ED-P1 must function when direct current of 1,2 A is applied throught the bridge, and function time must not exceed 100 μ s.

PACKING:

10 Electric detonators ED-P1 packed into a box
4 boxes (40 pcs.) packed into an intermediate box
2 intermediate boxes (80 pcs.) packed into a case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina