
UNIS "GINEX" d.d.

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

PRIMER FG 150

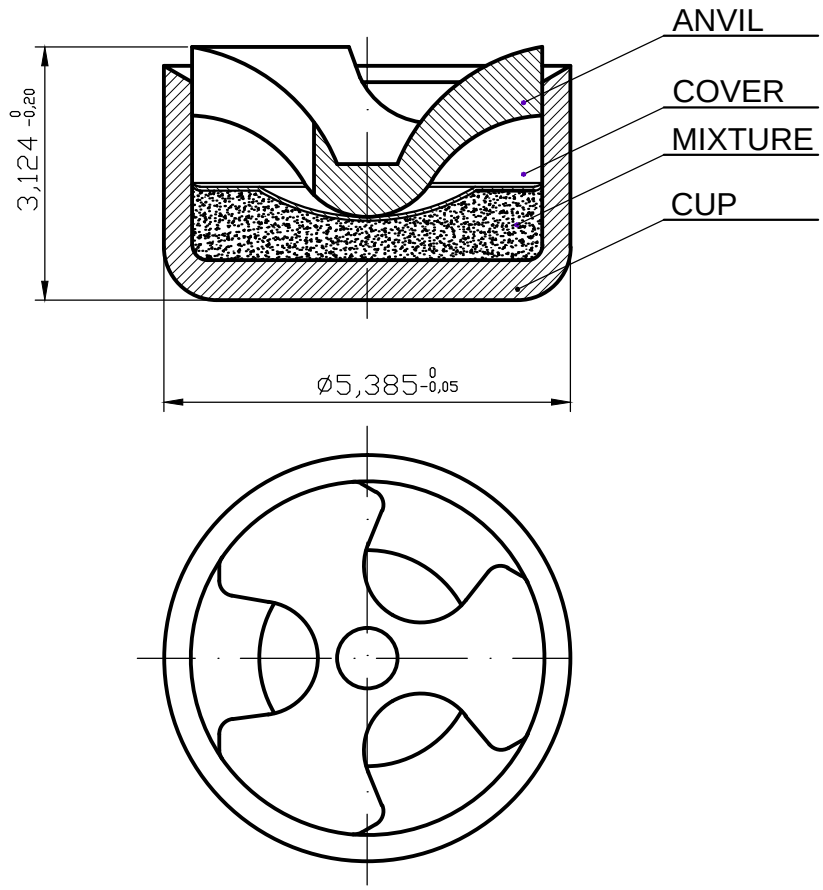

DESIGNED FOR USE IN:
mortar ammunition cal. 60mm, 82mm, 120mm

TECHNICAL CHARACTERISTICS		
Position	Material identification	Dimensions
Cup	CuZn30	$0{,}50^{0}_{-0{,}02}$ mm
Anvil	CuZn30	$0{,}91^{0}_{-0{,}03}$ mm
Cover	Paper disc	$0{,}10^{0}_{-0{,}02}$ mm
Primer lacquers	Nitrolacquer red	-
Mixture	Non corrosive, without Hg	$0{,}037^{\pm 0{,}002}$ g

SENSITIVITY	
Ball weight	55 g
Upper statistical limit	$\bar{H}$ + 5S ⩽ 406,4mm (16")
Lower statistical limit	$\bar{H}$ - 2S ⩾ 50,8 mm (2")
Firing pin	Ø2mm; R1mm
Testing in cartridge case	.45 ACP

PACKING
100pcs. of primers packed into a plastic tray with carton cover
50 pcs. of plastic trays packed into a carton box
8 carton boxes (40 000 pcs. of primers) packed into a special (carton or wooden) case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina