
UNIS "GINEX" d.d.

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

INITIAL BLASTING CAP IDK-3

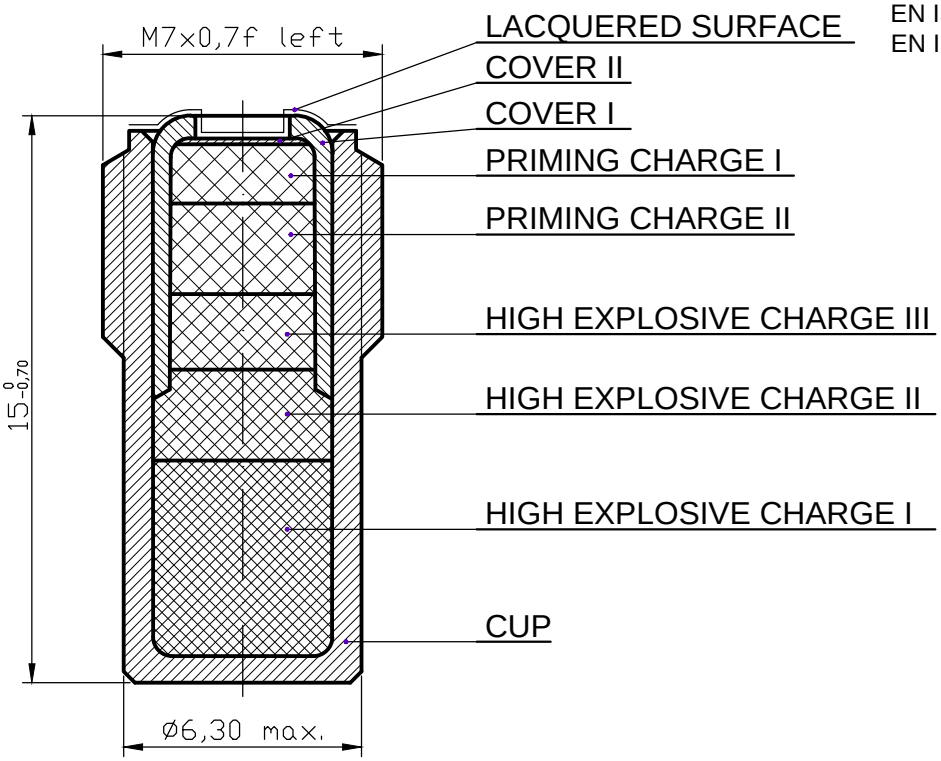

DESIGNED FOR USE IN:
Ammunition cal. 20 mm and 30 mm

TECHNICAL CHARACTERISTICS	
Position	Material identification
Cup	AlCu5PbBi.54
High explosive charge I	Penthrite
High explosive charge II	Penthrite
High explosive charge III	Penthrite
Priming charge II	Pb azide
Priming charge I	Priming mixture
Cover II	AlMg2.10
Cover I	Al 99,5.24
Lacquer surface	Nitro lacquer red

TESTINGS	
Ball weight	52 g
Upper sensitivity limit	80 mm
Lower sensitivity limit	5 mm
Firing pin	Ø3mm; R0,2mm; ∢30°
Testing in tools	

PACKING
100 pcs. of primers packed into a plastic tray with carton cover
1 plastic tray packed into a plastic box
5 plastic boxes packed into a carton box
30 carton boxes (15 000 pcs. of primers) packed into a special (carton or wooden) case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina