
UNIS "GINEX" d.d.

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

INITIAL BLASTING CAP IDK-34

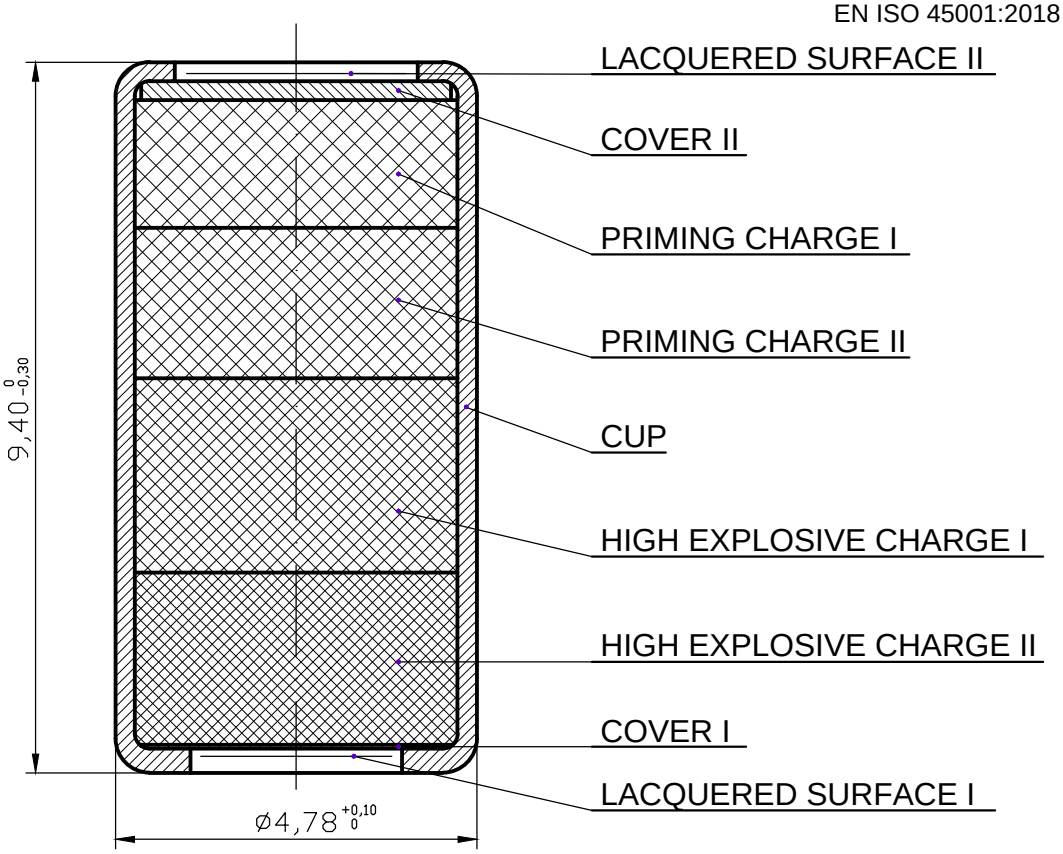

DESIGNED FOR USE IN:
Artillery ammunition

TECHNICAL CHARACTERISTICS	
Position	Material identification
Lacquered surface I	Nitrolacquer yallow
Cover I	Al 99,5.24
High explosive charge II	Penthrite
High explosive charge I	Penthrite
Cup	AlMn1.24
Priming charge II	Pb azide white
Priming charge I	Priming mixture
Cover, nickel plated	Al 99,5.10
Lacquered surface II	Nitrolacquer red

TESTINGS
Testing is performed in accordance to standard for primer IDK-34

PACKING
100 pcs. of primers packed into a plastic tray with carton cover
1 plastic tray packed into a plastic box
5 plastic boxes packed into a carton box
30 carton boxes (15 000 pcs. of primers) packed into a special (carton or wooden) case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina