
UNIS "GINEX" d.d.

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

BLASTING CAP KL-34

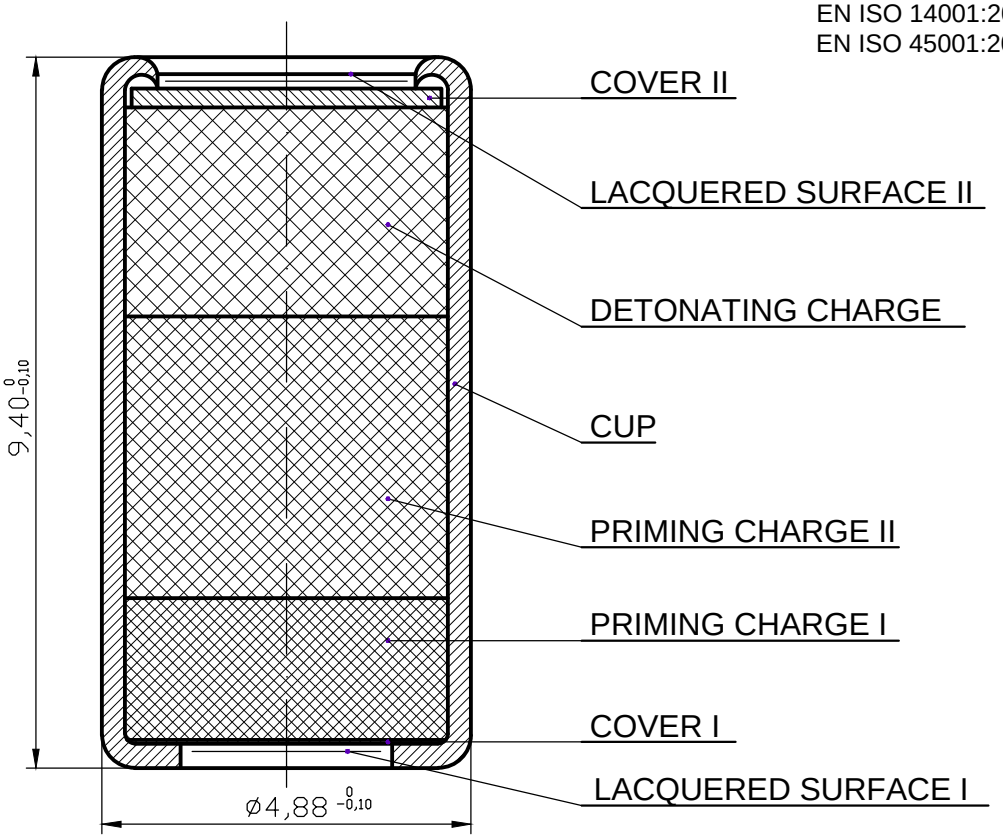

DESIGNED FOR USE IN:
Mines cal. 60mm; 82mm and 120mm

TECHNICAL CHARACTERISTICS	
Position	Material identification
Lacquered surface I	Nitrolacquer red
Cover I	Al 99,5.24
Priming charge I	Priming mixture
Priming charge II	Pb azide
Cup	AlMn1.24
Detonating charge	Hexogene (RDX)
Cover II	Al 99,5.24
Lacquered surface II	Nitrolacquer green

SENSITIVITY	
Ball weight	200±1 g
Sensitivity limit	80 mm
Firing pin	Ø4,2mm; R0,1mm; ∢26°
Testung in tools	

PACKING
100 pcs. of primers packed into a plastic tray with carton cover
1 plastic tray packed into a plastic box
5 plastic boxes packed into a carton box
30 carton boxes (15 000 pcs. of primers) packed into a special (carton or wooden) case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina