
UNIS "GINEX" d.d.

BLASTING CAP M-24-P4

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

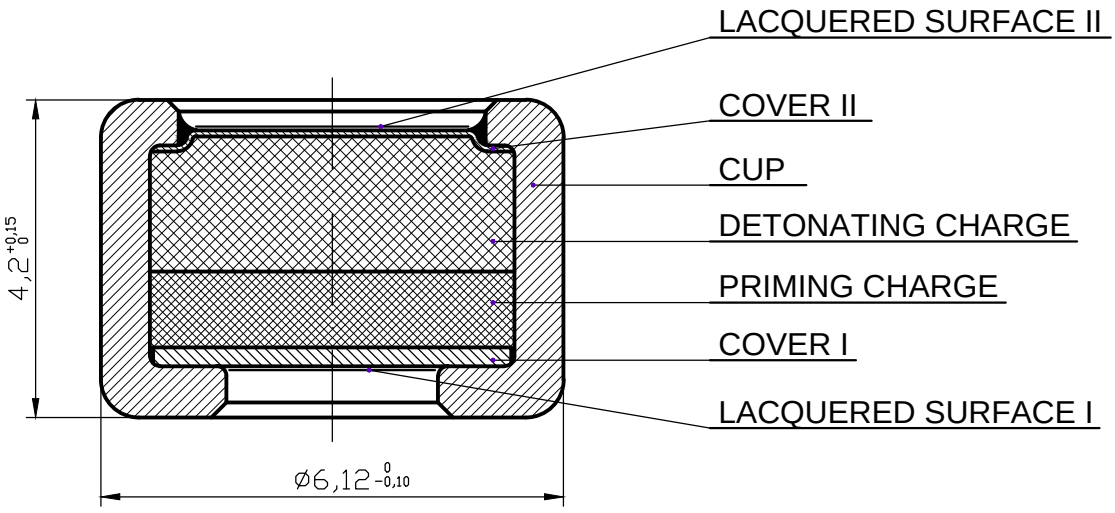

DESIGNED FOR USE IN:
Mortar shells and ammunition cal. 56-155 mm

TECHNICAL CHARACTERISTICS	
Position	Material identification
Lacquered surface I	Nitrolacquer red
Cover I	Al 99,5 t
Priming charge	Priming mixture
Detonating charge	Pb azide
Cup	AlMn1.24
Cover II	Al 99,5.24
Lacquered surface II	Nitrolacquer white

SENSITIVITY		
		Ball weight
Upper sensitivity limit	40 mm	200±1 g
Lower sensitivity limit	5 mm	100±1 g
Firing pin		Ø4,2 mm; ∢ 23°30'
Testung in tools		

PACKING
100 pcs. of primers packed into a plastic tray with carton cover
3 plastic tray packed into a plastic box
5 plastic boxes packed into a carton box
30 carton boxes (45 000 pcs. of primers) packed into a special (carton or wooden) case

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail:ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina